


Fake leather/ Ecopelle




COMPOSITION
COMPOSIZIONE

Coated fabric created by using innovative and high resistant components, without using phthalates, heavy metals and azo.
Tessuto spalmato realizzato con materiali innovativi ad alta resistenza, senza l'utilizzo di ftalati, metalli pesanti e azoici.


E20
Caramel
Caramello

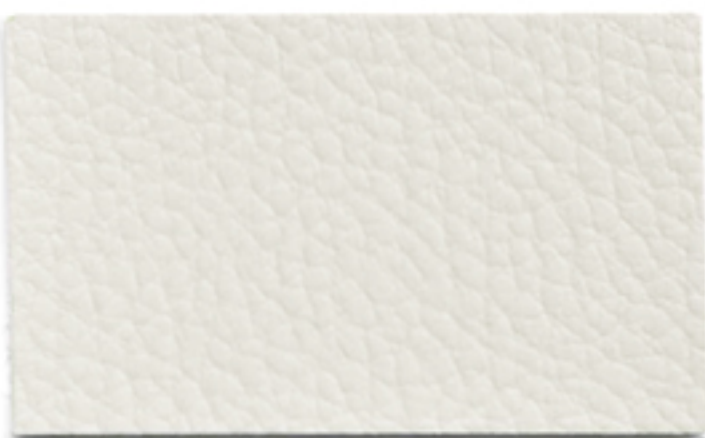

E21
White
Bianco

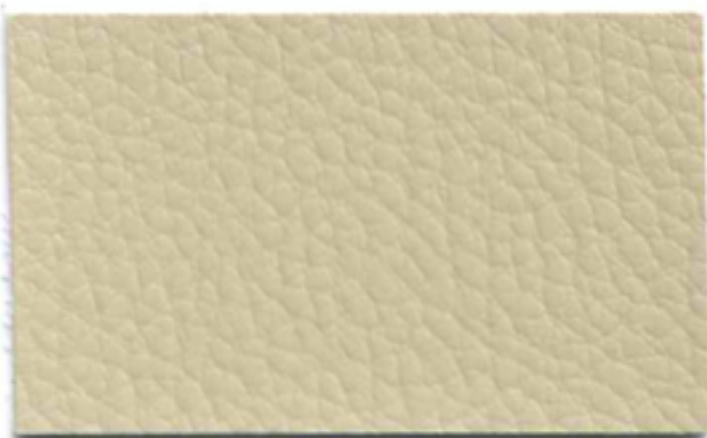

E22
Dove grey
Tortora

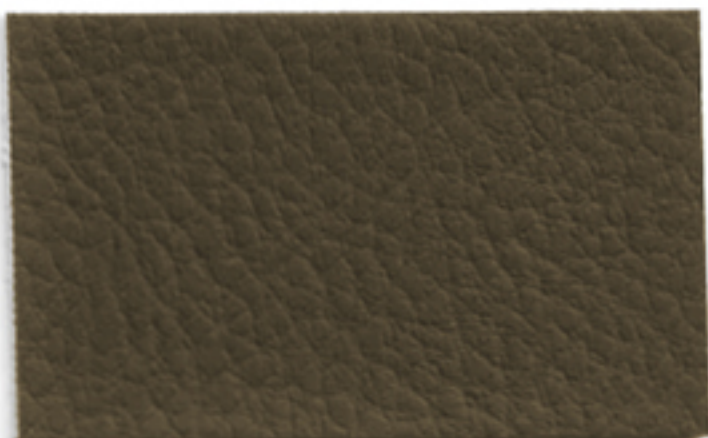

E23
Mocha
Caffè



E24
Black
Nero



E25
Brown
Marrone

Fake leather/ Ecopelle

Technical Proprietes	Standard	Unit	Values
Total weight ± 5%	UNI EN ISO 2286-P.2°	gr/m2	650
Backing's weight ± 5%	UNI EN ISO 2286-P.2°	gr/m2	80
Thickness ± 0,1	UNI EN ISO 2286-P.3°	mm	1,00
Density	-----	gr/m3	0,66
Coating composition	100% VINYL (Phthalates free)		
Backing composition	65% PES / 35% CO		
Full composition	88% VINYL / 8% PES / 4% CO		
Tensile resistance / warp side	UNI EN ISO 1421	N/5cm	300
Tensile resistance / weft side	UNI EN ISO 1421	N/5cm	200
Ultimate elongation / warp	UNI EN ISO 1421	%	40
Ultimate elongation / weft	UNI EN ISO 1421	%	145
Tear resistance / warp	UNI EN ISO 4674-1 meth.B	N	20
Tear resistance / weft	UNI EN ISO 4674-1 meth.B	N	15
Peel adhesion / warp	UNI EN ISO 2411	N/5cm	30
Peel adhesion / weft	UNI EN ISO 2411	N/5cm	30
Bally at + 23° C	UNI 4818 - P.13	cycles	150.000
Bally at - 10° C	UNI 4818 - P.13	cycles	15.000
Xeno test 800h	UNI EN ISO 4892-2 B1	Grey scale	4/5
Xeno test 800h	UNI EN ISO 4892-2 B2	Grey scale	4/5
Colour fastness to rubbing/dry	UNI EN ISO 105-X12	Grey scale	4/5
Colour fastness to rubbing/wet	UNI EN ISO 105-X12	Grey scale	4/5
Colour fastness to rubbing with alcohol use	UNI EN ISO 105-X12	Grey scale	4/5
Colour fastness to Urine	UNI EN ISO 105-X12 (urea 1,2 g/l)	Grey scale	4/5
Colour fastness to rubbing with 5% Sodium Hypochlorite	UNI EN ISO 105-X12	Grey scale	4/5
Tropical Test (70°C - 95% hum. - 840 h)	UNI EN ISO 1419-C	visual	Resistant
Acetone resistance	Uni 4818 – p.16	-----	Resistant
Martindale dry method	UNI EN ISO 12947-2	cycles	≥ 200.000
Flame retardant	IT: Classe 1 I M - UNI 9175 US: TB 117 : 2013 - FMVSS 302 EU: UNI EN 1021 part 1 & part 2 : 2014 UK: BS 5852 : 2006 source 0 & source 1		
Cleaning	Surface washable with water and neutral soap. Bleach diluted in water (5% Bleach) For disinfection, sanitization and cleaning suggestions refer to the appropriate annex via our web site.		

These are statistic average results. We reserve the right to make changes without notice insofar as the product remains suitable for the intended use.
If you would like to know about other colours available with a price increase, please contact us at sovet@sovet.com

