



Tessuto CURA

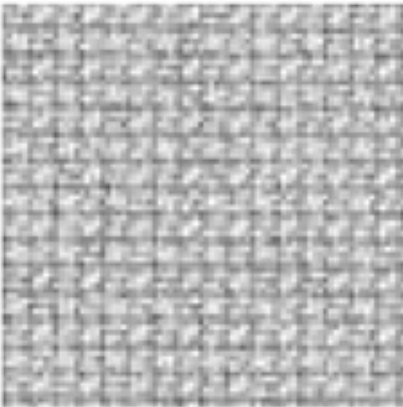

F30
Cura 6000

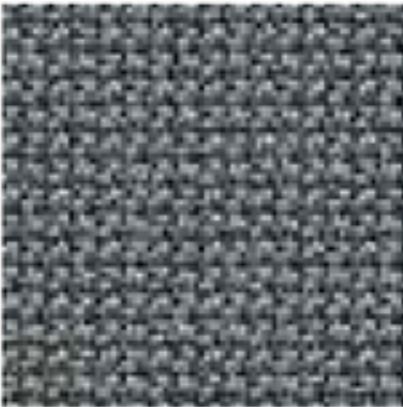


F31
Cura 60100



F32
Cura 60999




F33
Cura 61168

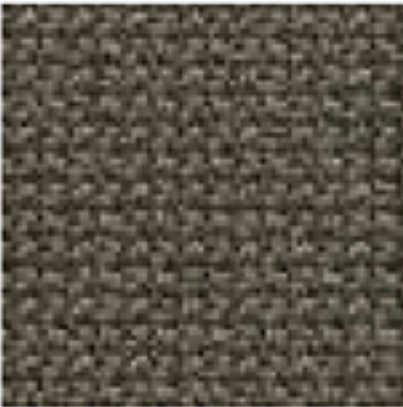

F34
Cura 61169




F35
Cura 64196

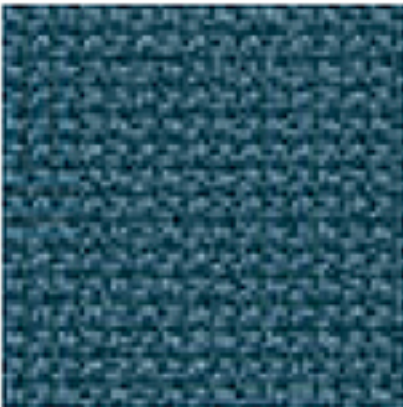


F36
Cura 66167



F37
Cura 68182

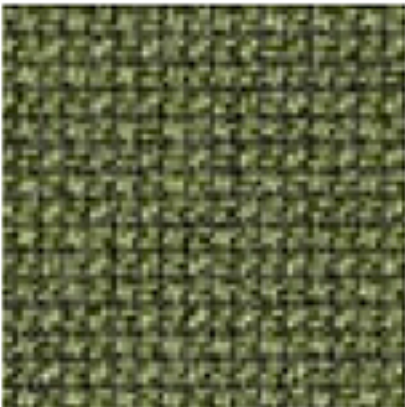

F38
Cura 68261

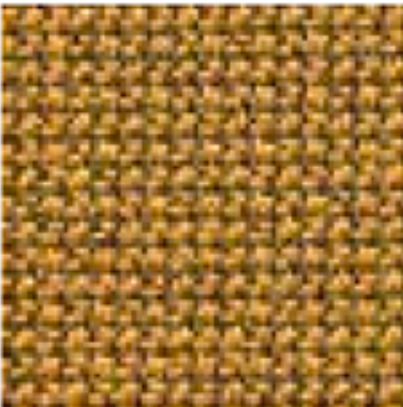

F38
Cura 62083

Technical Proprietes	Standard	Unit	Values
airflow resistance	EN 29053 & ISO 9053-1	RS / (Pa s / m)	237
Abrasion resistance	BS EN ISO 12947-2	cycles	100.000
Abrasion resistance	ASTM D4157 - 07	cycles	100.000
Lightfastness	EN ISO 105 - B02		Note 5-8
Fastness to dry rubbing	EN ISO 105 - X12		Note 4-5
Pilling	EN ISO 12945-2		Note 4-5

US ACT

AATCC 8 or 116 Dry/wet crocking	PASS
ASTM D4157-07 Wyz abrasion 100k	PASS
ASTM D3511 Pilling	PASS
AATCC 16 Light fastness	PASS
CA TB 117-2013	PASS
ASTM E 84 Class 1	PASS

FLAMMABILITY

US	CA TB 117-2013
US	ASTM E 84 Class 1
UK	BS EN 1021 1&2 Cigarette and Match

These are statistic average results. We reserve the right to make changes without notice insofar as the product remains suitable for the intended use.
If you would like to know about other colours available with a price increase, please contact us at sovet@sovet.com