


Paddington



F40
Paddington 1

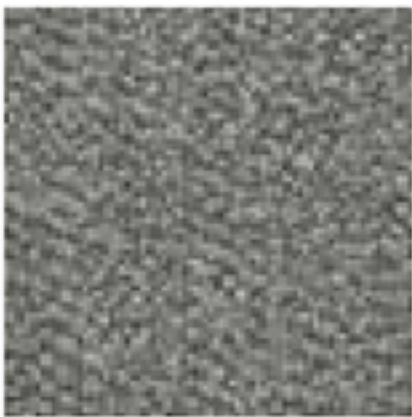

F41
Paddington 11



F42
Paddington 15



F43
Paddington 2



F44
Paddington 3



F45
Paddington 4




F46
Paddington 6



F47
Paddington 8



F48
Paddington 9

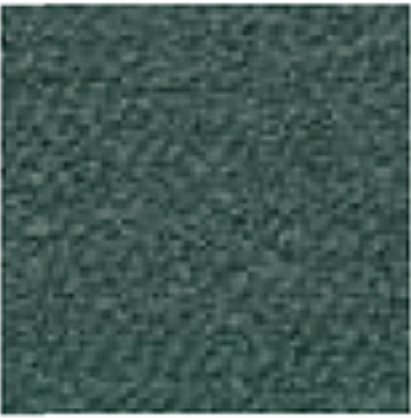

F49
Paddington 12

Paddington

Technical Proprieties	Standard	Unit	Values
Tensile (breaking) strength	UNI EN ISO 13934 - 1		
Tear strength	UNI EN ISO 13937 - 3		
Seam slippage-6 mm	UNI EN ISO 13936-2	Ordito/Warp Trama/Weft	<6mm <6mm
Martindale abrasion	UNI EN ISO 12947-2	cycles	30.000
Pilling	UNI EN ISO 12945 2:2002	cycles	4
Colour fastness to light	UNI EN ISO 105 - B02	Scale: 1 to 8	4/5
Colour fastness to dry rubbing	UNI EN ISO 105 - X12	Scale: 1 to 5	4
Colour fastness to wet rubbing	UNI EN ISO 105 - X12	Scale: 1 to 5	3
Colour fastness to abrasion	UNI EN ISO 12947-2	Scale: 1 to 5	3/4
Colour fastness to dry cleaning	UNI EN ISO 105 - D01	Scale: 1 to 5	4
Colour fastness to washing	UNI EN ISO 105 - C06	Scale: 1 to 5	3

These are statistic average results. We reserve the right to make changes without notice insofar as the product remains suitable for the intended use.
If you would like to know about other colours available with a price increase, please contact us at sovet@sovet.com

